

# Instruction manual EPC 903

automatic door systems – this is record!



record.group

2/ 4

## 1 Operating instructions Easy-Programmer EPC 903






Easy-Programmer EPC 903











102-903809037

**NOTICE**

The Easy-Programmer EPC 903 is only intended for use on system 20 doors by agtatec ag with only one BDE-D!

**Connection of EPC 903****User Manual**

<b>Language</b> <input type="radio"/> DEUTSCH <input type="radio"/> FRANCAIS <input checked="" type="radio"/> <b>ENGLISH</b>	Choose your desired language
<b>STA21 V1.24</b> Basic operator	<ul style="list-style-type: none"> <li>Press the black push-button and this key  together</li> <li>Let only the black button loose and wait until the message on the left appears.</li> </ul> Now you can press the button 
<b>Parameter</b> <input type="checkbox"/> Display state <input type="checkbox"/> Configure system <input checked="" type="checkbox"/> <b>Learning system</b>	Choose "Learning system" and confirm with the button  <sup>E</sup>
<div>No</div> <div>Running parameter?</div> <div>Yes</div> <div>Cancel</div> <div>Please wait until the door is open</div>	Confirm with the button  <sup>E</sup> (yes) or  <sub>c</sub> (no)

User Manual	
<div>Cancel</div> <div>Please close the door completely</div> <div>Closed</div> <div>Cancel</div> <div>Please wait until the door is open</div>	Hold the button  pressed until the door is closed
<div>Cancel</div> <div>Please close the door completely</div> <div>Closed</div>	Hold the button  pressed until the door is closed
<div>Learning running param. completed</div> <div>Continue</div>	Confirm with the button 
<div>No</div> <div>Learning sensors?</div> <div>Yes</div> <div>Cancel</div> <div>Please wait until the door is open</div>	Confirm with the button  (yes) or  (no)
<div>Cancel</div> <div>Please close the door completely</div> <div>Closed</div>	Hold the button  pressed until the door is closed
<div>Learning sensor completed</div> <div>Completed</div>	Confirm with the button 
<div>Parameter</div> <div>Display state</div> <div>Configure system</div> <div>Learning system</div>	Press the button  , to exit the menu
<div>No</div> <div>Quit menu?</div> <div>Yes</div>	Confirm with the button  (yes) or  (no)

## Contact

### → record UK limited

Head Office: Unit D, 9 Watt Place – Hamilton International Park – Blantyre – G72 0AH – UK

Central Office: Batley Business Centre – Unit 40 – Annexe 2 – Technology Drive – Batley – WF17 6ER – UK

Southern Office: 17 Invincible Road – Farnborough – GU14 7QU – UK

tel.: +44 1698 376411 – fax: +44 1698 376422 – [info@recorduk.co.uk](mailto:info@recorduk.co.uk) – [www.recorduk.co.uk](http://www.recorduk.co.uk)

### → record global export


agtatec ltd – Allmendstrasse 24 – 8320 Fehraltorf – Switzerland

tel.: +41 44 954 91 91 – e-mail: [export@record.global](mailto:export@record.global) – [www.record.global](http://www.record.global)

### → Headquarters

agtatec ltd – Allmendstrasse 24 – 8320 Fehraltorf – Switzerland

tel.: +41 44 954 91 91 – e-mail: [info@record.group](mailto:info@record.group) – [www.record.group](http://www.record.group)

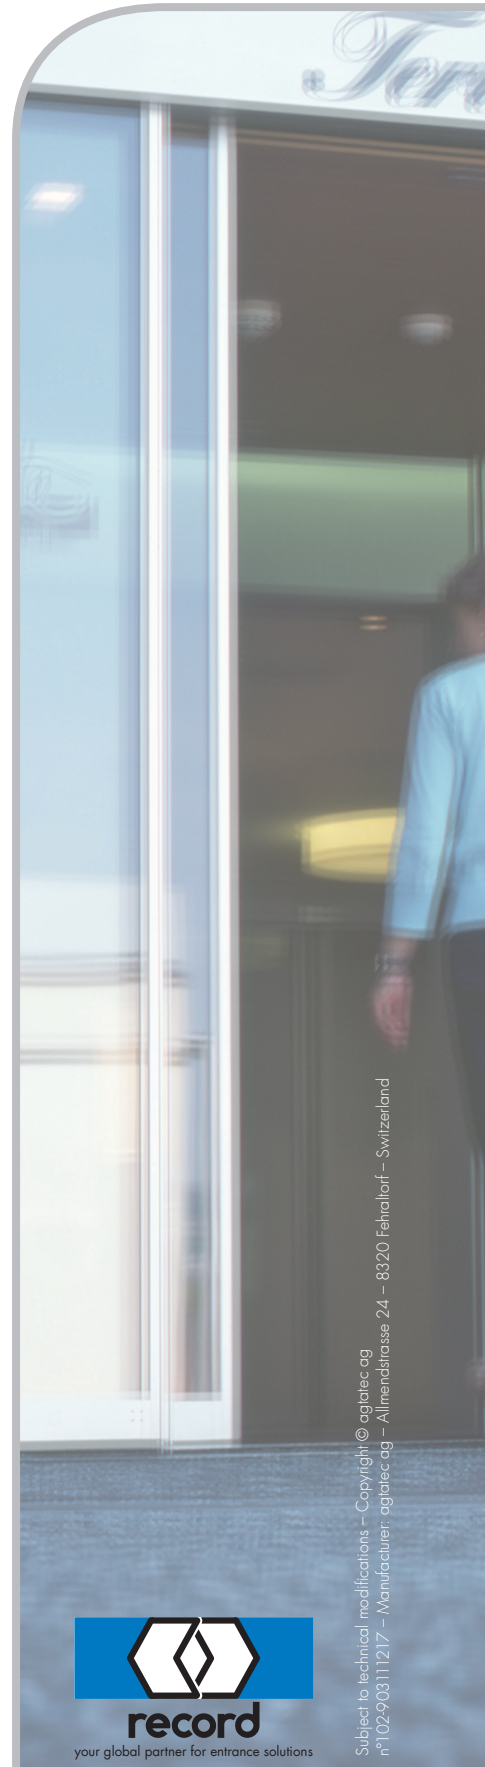

**record**

your global partner for entrance solutions